

PRODUCT ENHANCEMENT MEMO

Tubular Panel Support Leg Addition



P.O. Box 8100
Green Bay, WI 54308-8100

To: All OEI Personnel, all OEI customer corporate and panel factory contacts

From: Mark Bushaw/OEI Engineering


Date: 3/31/15

Re: The addition of a tubular panel support leg with either an open or perforated insert design to be used on PowerWorks/Crescendo, System XXI/Classic XXI or Stack & Tile/NeoClassic.



The addition of the support legs are available for **Powerworks/Crescendo** in the open support leg (PSL) or the support leg w/perforated insert (PSLI) will be available in the standard height of 29" and 3 different depths of 18", 24" and 30". Left and right applications will still apply but the support legs have been designed for use with any of our panel systems on either 74P or knife edge applications.

Powerworks/Crescendo legs are configured using the model/left or right application/edge style/color. Example: PSL3029-L-KN-SX, Open leg, 30" depth, Left, Knife Edge worksurface, in Starlight Silver.

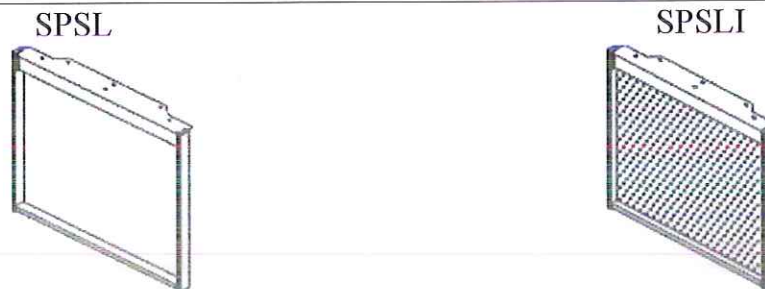

The addition of the support legs are available for **System XXI/Classic XXI or Stack & Tile/NeoClassic** in the open support leg (SPSL) or the support leg w/perforated insert (SPSLI) will be available in the standard height of 29" and 3 different depths of 18", 24"

and 30". Left and right applications will still apply but the support legs have been designed for use with any of our panel systems on either 74P or knife edge applications.

System XXI/Classic XXI or Stack & Tile/NeoClassic legs are configured using the model/left or right application/edge style/color. Example: SPSLI3029-L-KN-SX, Leg w/insert, 30" depth, Left, Knife Edge worksurface, in Starlight Silver.

AVAILABLE COLORS: Gray, Black, Sand, Warm Gray, Light Tone and Starlight Silver.

SPECIFICATION GUIDELINES:	<u>74P Edge</u>	<u>KNIFE EDGE</u>
24" Deep Worksurfaces	2429	1829
30" Deep Worksurfaces	3029	2429

Please contact me with any questions or concerns.

Mark Bushaw

OEI Engineering

mark.bushaw@oei-inc.com

(O) 920-468-2629

(C) 920-412-8849

(F) 920-468-2633